

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

Patent Abstracts of Japan

PUBLICATION NUMBER : 04372536
PUBLICATION DATE : 25-12-92


APPLICATION DATE : 19-06-91
APPLICATION NUMBER : 03147623

APPLICANT : OMRON CORP;

INVENTOR : FUJII YUJI;

INT.CL. : H02J 7/34 G01R 31/36 H02J 7/00

TITLE : ELECTRONIC EQUIPMENT USING
STORAGE BATTERY

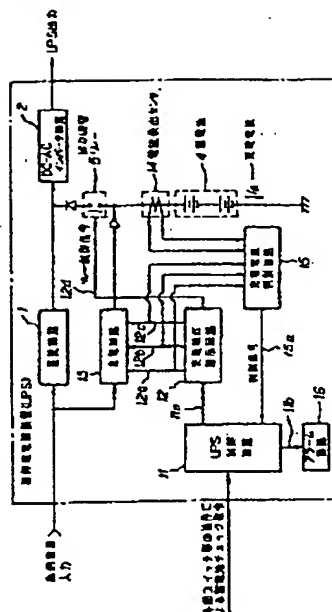

ABSTRACT : PURPOSE: To detect the state of a storage battery automatically without requiring time or labor from a user, etc., and without discharging the storage battery to exert an influence upon the life of the battery.

CONSTITUTION: According to instructions of a UPS(uninterruptible power supply) control circuit 11, a charging voltage instruction circuit 12 successively gives a charging circuit 13 instructions to apply a voltage lower than the optimum charging voltage of the storage battery 4, the optimum charging voltage and a voltage higher than the optimum charging voltage to the storage battery 4, and the charging circuit 13 charges the storage battery 4 according to these instructions. A current detection sensor 14 detects the value of a charging current i_B supplied to the storage battery 4 at that time and sends the value to a charging current discrimination circuit 15. The charging current discrimination circuit 15 compares the value of the charging current i_B with a charge completion current value obtained when the storage battery 4 is normal and in a charge completion state, discriminates the state of the storage battery, i.e., a normal state, overdischarge state or deterioration state caused by a high impedance deterioration, etc., and sends a discrimination signal to the UPS control circuit 11.

COPYRIGHT: (C) JPO